
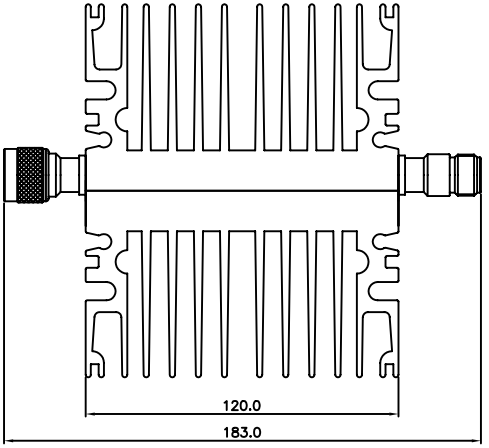


Revision						
ISSUE	Mark	Contents	Design	Check	Appro	DATE
1.0	⚠	XX → XX				2008. 12. 03

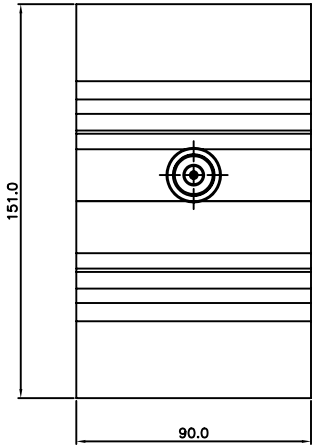

ELECTRICAL SPECIFICATIONS

- | | |
|--------------------------|------------------|
| 1. Frequency Range (MHz) | DC to 3 Ghz |
| 2. Impedance (Nominal) | 50 Ohms |
| 3. V.S.W.R (Max.) | 1.25 |
| 4. Attenuation | 10, 20, 30, 40dB |
| 5. Accuracy | ± 1.0dB |
| 4. Power Rating | AVG. 100 watt |

MECHANICAL SPECIFICATIONS

- Connector Body : Brass
SuCo Plated
- Connector Contact : Brass
Gold Plated
- Housing : Aluminum
Black Anodized

No.	Description	Code	Q'ty	Material	Finish		
Specified Tolerance		Mat'l	AL6061				
0.	±0.3	Finish					
.0	±0.1	Design				Check	Appro
.00	±0.05	ANG.				±0°30'	
Scale	Unit	Proj	Size	070213			
1/1	mm	⊕	⚠	Part No.	FA-N100		

CROSS RF SOLUTIONS
HIGH POWER ATTENUATOR
N PLUG-JACK (100watt)
Mod.No.
FA-N100